


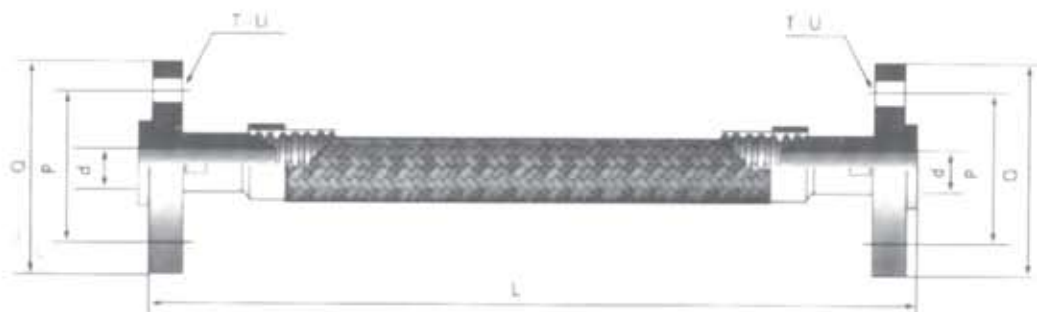

Tamaño	Modelo	Presión de Trabajo MPa	Presión de Prueba MPa	Presión de Ruptura MPa	Máxima Torsión (mm) Estática	Máxima Torsión (mm) Dinámica	d	Q	P	T	U	L
10	RF10	2.5	3.7	10	65	145	7	90	60	4	14	
12	RF12	1.6	2.4	6.4	70	160	9	95	65	4	14	
14	RF14	1.6	2.4	6.4	75	175	11	95	65	4	14	
15	RF15	1.6	2.4	6.4	80	180	12	95	65	4	14	
16	RF16	1.6	2.4	6.4	85	210	13	105	75	4	14	
18	RF18	1.6	2.4	6.4	110	220	15	105	75	4	14	Largo estándar
20	RF20	1.6	2.4	6.4	120	270	16	105	75	4	14	500 mm sobre pedido
22	RF22	1.6	2.4	4	135	320	18	105	75	4	14	diferentes largos.
25	RF25	1.6	2.4	4	160	360	21	115	85	4	14	
30	RF30	1.6	2.4	4	170	390	25	115	85	4	18	
32	RF32	1.6	2.4	4	175	400	28	140	100	4	18	
38	RF38	1.6	2.4	4	200	480	34	150	110	4	18	
40	RF40	1.6	2.4	4	225	510	37	150	110	4	18	
42	RF42	1.6	2.4	4	250	550	37	150	110	4	18	
48	RF48	1.6	2.4	4	270	600	43	165	125	4	18	
50	RF50	1.2	1.8	3.5	280	640	45	165	125	8	18	
65	RF65	1.2	1.8	3.5	360	700	65	185	145	8	18	
75	RF75	1.2	1.8	3.5	520	860	70	200	160	8	18	
100	RF100	1.2	1.8	3.5	610	1360	94	220	180	8	18	